






Product Type: Standard intermediate relay

Product Name:RG-24DC-2C

Product Description: Standard industrial relay,2transfer contact 24VDC/ 7A

## Product Size

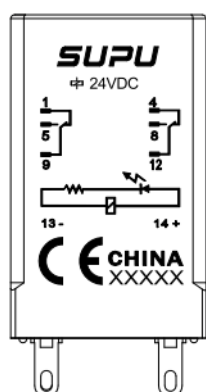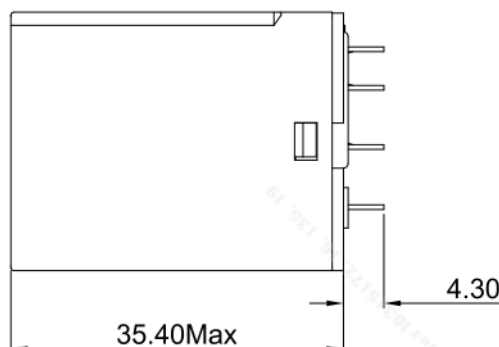

## Parameters

|                                   |            |
|-----------------------------------|------------|
| ⌘ SUPU ID                         | RG-24DC-2C |
| ⌘ Protection Level                | IP40       |
| ⌘ Ambient temperature (operation) | -40~+55°C  |

|                                 |                    |
|---------------------------------|--------------------|
| ☞ Ambient temperature (storage) | -40~+70°C          |
| ☞ Mounting Type                 | optional           |
| ☞ Connection method             | push-in connection |

## Technical data

|                                |                                                                                                    |
|--------------------------------|----------------------------------------------------------------------------------------------------|
| ☞ IEC Rated Voltage            | 24DC                                                                                               |
| ☞ Overvoltage category         | II                                                                                                 |
| ☞ Degree of pollution          | 2                                                                                                  |
| ☞ Dielectric withstand voltage | 1500VAC 1min : Coils/ contacts 1000VAC<br>1min : BetweenContacts 1500VAC<br>1min : BetweenContacts |
| ☞ Endurance                    | Mechanical 10 million cycles or more Electrical more than 100,000 times                            |
| ☞ Operating voltage            | ≤75% of rated voltage                                                                              |
| ☞ Release Voltage              | ≥10% of rated voltage                                                                              |
| ☞ Maximum permissible voltage  | 110% of rated voltage                                                                              |
| ☞ Nominal power consumption    | About0.9W~1.1W                                                                                     |
| ☞ Response time                | 20ms or less                                                                                       |
| ☞ Release time                 | 15ms or less                                                                                       |
| ☞ Protective circuit           | None                                                                                               |
| ☞ Status display               | visual                                                                                             |
| ☞ Maximum switching power      | 1750VA/210W                                                                                        |
| ☞ Rated load capacity          | AC250V/7A DC30V/7A                                                                                 |
| ☞ Rated load current           | 7A                                                                                                 |
| ☞ Insulation resistance        | 1000MΩ (500VDC)                                                                                    |

Commercial data

|                          |            |
|--------------------------|------------|
| ☞ Order No               | RG-24DC-2C |
| ☞ Packing unit           | 20         |
| ☞ Minimum order quantity | 20         |
| ☞ Single piece weight    | 35g        |

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat