Product Type: Standard intermediate relay

Product Name:RG-230AC-4C

Product Description: Standard industrial relay,4transfer contact 230VAC/ 5A

Product Size



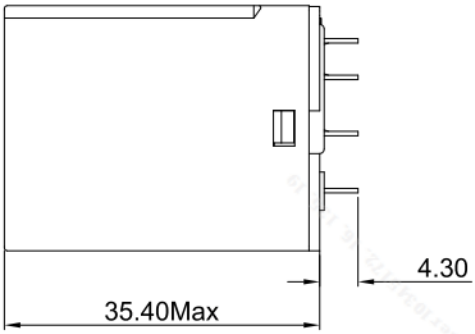

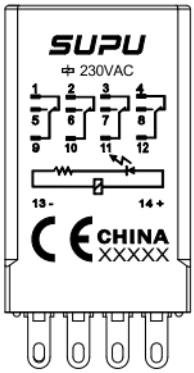

Parameters

SUPU ID	RG-230AC-4C
Protection Level	IP43
Ambient temperature (operation)	-40~+55°C

Ambient temperature (storage)	-40~+70°C
Mounting Type	optional
Connection method	push-in connection

Technical data

IEC Rated Voltage	230AC
Overvoltage category	II
Degree of pollution	5
Dielectric withstand voltage	1500VAC 1min：Coils/ contacts 1000VAC 1min：BetweenContacts 1500VAC 1min：BetweenContacts
Endurance	Mechanical 10 million cycles or more Electrical more than 100,000 times
Operating voltage	≤80% of rated voltage
Release Voltage	≥30% of rated voltage
Maximum permissible voltage	110% of rated voltage
Nominal power consumption	About1.1~1.8VA
Response time	20ms or less
Release time	25ms or less
Protective circuit	None
Status display	visual
Maximum switching power	1250VA/150W
Rated load capacity	AC250V/5A DC30V/5A
Rated load current	5A
Insulation resistance	1000MΩ（500VDC）

Commercial data

Order No	RG-230AC-4C
Packing unit	20
Minimum order quantity	20
Single piece weight	35g

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

The right to modify data belongs to SUPU.