


Product Type: IP67 connector

# Product Name:ESF-RS120A25YC

Product Description: Connectors suitable for energy storage modules: Color: Orange Wire cross-section: 25mm<sup>2</sup> Rated voltage: 1500V DC Rated current: 120A Connection method: crimping Contact type: Pin

## Product Size

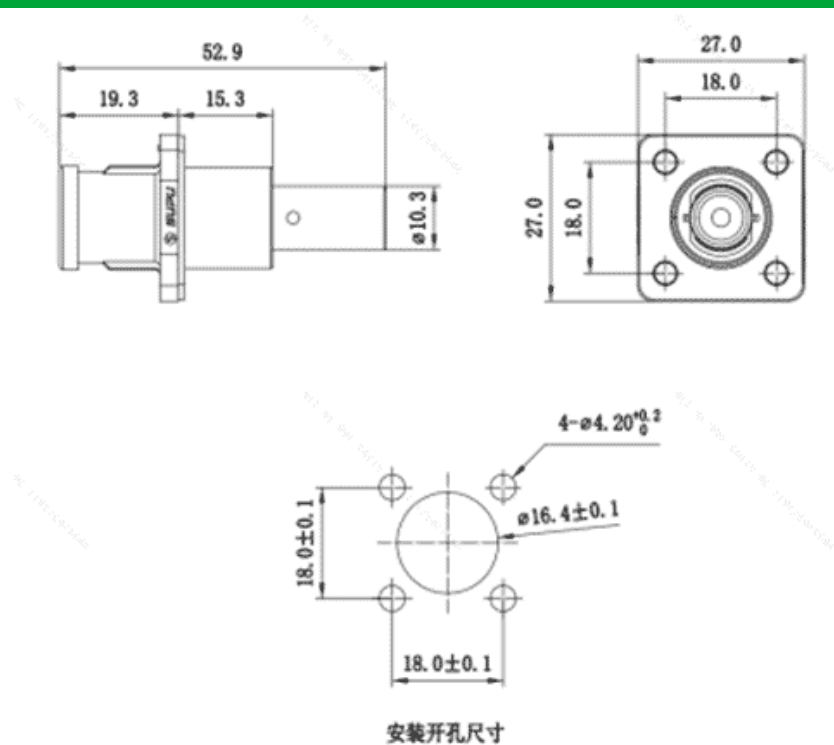

## Parameters

|                                                           |                |
|-----------------------------------------------------------|----------------|
| <div> <div></div> <div>SUPU ID</div> </div>               | ESF-RS120A25YC |
| <div> <div></div> <div>Number of connections</div> </div> | 1              |
| <div> <div></div> <div>Connection method</div> </div>     | 压接             |

|                               |              |
|-------------------------------|--------------|
| ☞ Protection Level            | IP67         |
| ☞ Operating temperature range | -40℃~125℃    |
| ☞ Insulation material         | PA           |
| ☞ Insulation material group   | III          |
| ☞ Contact material            | Copper alloy |
| ☞ Contact plating             | Ag,Plated    |
| ☞ Insertion/withdrawal cycles | 100          |
| ☞ Insertion force             | ≤75N         |
| ☞ Withdrawal force            | ≥10N         |

## Technical data

|                            |                          |
|----------------------------|--------------------------|
| ☞ Overvoltage category     | III                      |
| ☞ Degree of pollution      | 3                        |
| ☞ Rated impulse voltage    | 12.3KV                   |
| ☞ UL Rated Current         | 120A                     |
| ☞ UL Rated Voltage         | 1500V                    |
| ☞ Stripping length         | 20mm±1mm                 |
| ☞ Rated cross section      | 25mm <sup>2</sup> (AWG4) |
| ☞ Rated cross section(AWG) | 25mm <sup>2</sup> (AWG4) |
| ☞ External cable diameter  | /                        |

## Commercial data

|                |                |
|----------------|----------------|
| ☞ Order No     | ESF-RS120A25YC |
| ☞ Packing unit | 1              |

☞ Minimum order quantity

PCS

☞ Single piece weight

23.3g

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2026-03-12 19:15

The right to modify data belongs to SUPU.