




Product Type: Fixed terminal

Product Name:MC-
TTD5.08H51C-0001

Product Description: Pitch:5.08mm Rated
Voltage : 400V Rated Current:24A Connection
method : Screw connection colour : customizable

Product Size

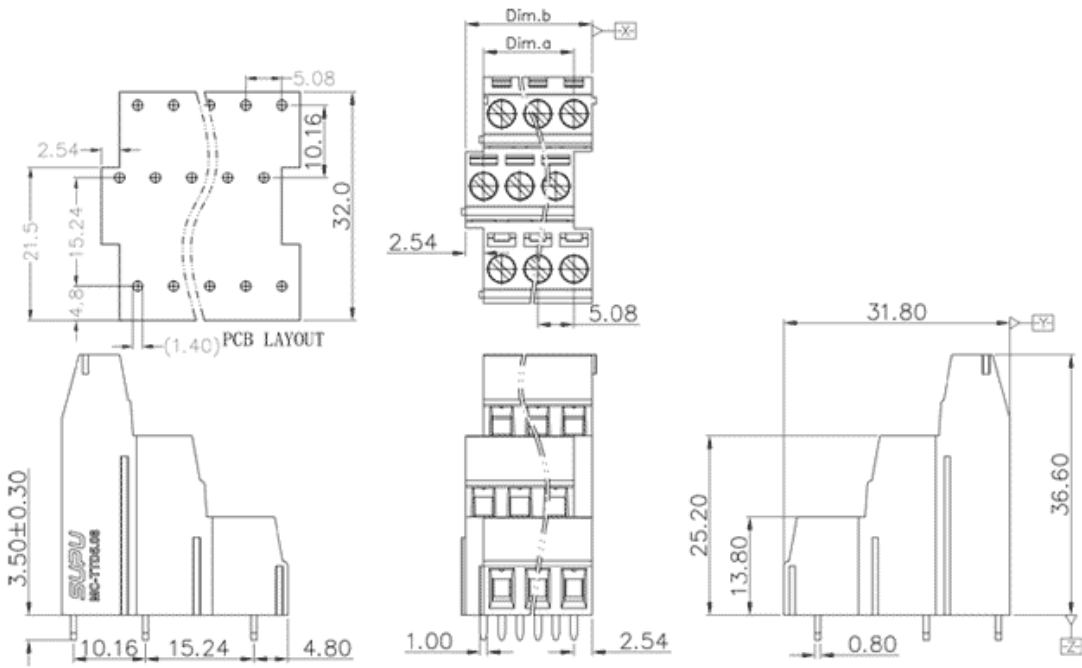

Parameters

☞ SUPU ID	MC-TTD5.08H51C-0001
☞ Pitch	5.08
☞ Number of levels	Multi-Layer
☞ Number of connections	51

Connection method	Screw connection
Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Green/Black/Blue/Grey/Orange/Red

Technical data

IEC Rated Current	24A
IEC Rated Voltage	400V
Overvoltage category	III/III/ II
Degree of pollution	3 2 2
Rated impulse voltage	4.0KV 4.0KV 4.0KV
UL Rated Current	15A - 10A
UL Rated Voltage	300V - 300V
Conductor cross section rigid	0.2-2.5mm ²
Conductor cross section flexible	0.2-2.5mm ²
Conductor cross section flexible,with ferrule	-
Locking screw Specification	M3
Locking screw torque	0.5~0.6N.m
Fixed Screw Specification	-
Stripping length	7-8mm

☞ Order No

MC-TTD5.08H51C-0001

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat