




Product Type: Direct crimp connectors

Product Name: DP381H1XXF-BK-0Y10

Product Description: Pitch: 3.81mm

Rated Voltage : 250V Rated current : 8A Single-level CE

Product Size

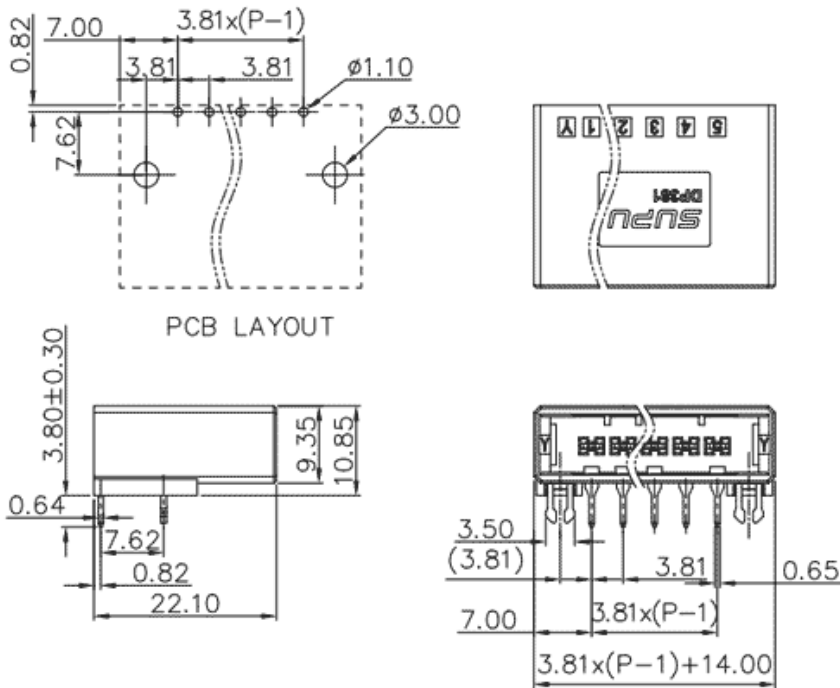

Parameters

| | |
|-------------------------|--------------------|
| ⌘ SUPU ID | DP381H1XXF-BK-0Y10 |
| ⌘ Pitch | 3.81 |
| ⌘ Number of levels | Single layer |
| ⌘ Number of connections | XX |

| | |
|-------------------------------|---------------|
| ☞ Connection method | Cold pressing |
| ☞ Protection Level | IP20 |
| ☞ Operating temperature range | -40~+105°C |
| ☞ Insulation material | PBT |
| ☞ Insulation material group | II |
| ☞ Contact material | Copper alloy |
| ☞ Contact plating | Sn,Plated |

Technical data

| | |
|-------------------------------------------------|-------------------|
| ☞ IEC Rated Current | 8A |
| ☞ IEC Rated Voltage | 160V |
| ☞ Overvoltage category | III/III/ II |
| ☞ Degree of pollution | 3 2 2 |
| ☞ Rated impulse voltage | 2.5KV 2.5KV 2.5KV |
| ☞ UL Rated Current | 8A |
| ☞ UL Rated Voltage | 250V |
| ☞ Conductor cross section rigid | - |
| ☞ Conductor cross section flexible | - |
| ☞ Conductor cross section flexible,with furrule | - |
| ☞ Locking screw Specification | - |
| ☞ Locking screw torque | - |
| ☞ Fixed Screw Specification | - |
| ☞ 固定螺钉扭矩 | - |
| ☞ Stripping length | - |

☞ Use group -

☞ Rated cross section -

Commercial data

☞ Order No

DP381H1XXF-BK-0Y10

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2026-04-27 10:48

The right to modify data belongs to SUPU.