

Product Type: Quick plug connector

Product Name:ESF-PS250A20YBQ-020


Product Description: Dual (positive and negative) integrated connector for energy storage module

Color: Orange & Black Rated voltage: 1500V DC

Rated current: 250A Connection method: PT

Contact type: Pin Socket copper bar cross-section: 70mm² copper bar size: 20mm*3.5mm

Product Size

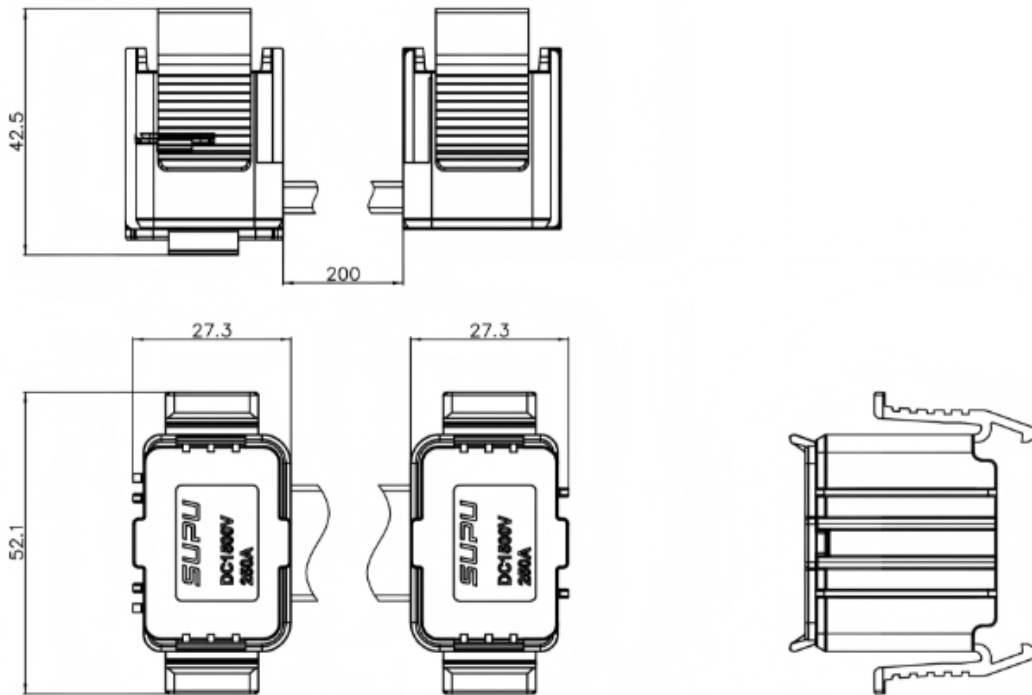

Parameters

<input checked="" type="checkbox"/> SUPU ID	ESF-PS250A20YBQ-020
<input checked="" type="checkbox"/> Connection method	Spring Contact
<input checked="" type="checkbox"/> Protection Level	IP67

<input type="checkbox"/> Operating temperature range	-40°C~125°C
<input type="checkbox"/> Insulation material	PA
<input type="checkbox"/> Insulation material group	III
<input type="checkbox"/> Contact material	Copper alloy
<input type="checkbox"/> Contact plating	Sn,Plated
<input type="checkbox"/> Insertion/withdrawal cycles	100
<input type="checkbox"/> Insertion force	≤100N
<input type="checkbox"/> Withdrawal force	≥10N

Technical data

<input type="checkbox"/> Rated Voltage	1500V
<input type="checkbox"/> Overvoltage category	III
<input type="checkbox"/> Degree of pollution	3
<input type="checkbox"/> Rated impulse voltage	12.3KV
<input type="checkbox"/> Rated cross section	70mm ² (AWG2/0)
<input type="checkbox"/> Rated cross section(AWG)	AWG2/0

Commercial data

<input type="checkbox"/> Order No	ESF-PS250A20YBQ-020
<input type="checkbox"/> Packing unit	PCS
<input type="checkbox"/> Minimum order quantity	1
<input type="checkbox"/> Weight per unit (without packaging)	0.274KG
<input type="checkbox"/> Single piece weight	0.272KG

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China


Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail: supucontact@supu.cn

Service Hotline: 400-626-6336

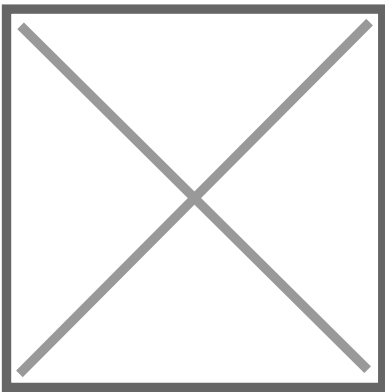

Wechat